

Container Components Europe Limited

The world lid specialist

FA3634 TOP HINGED FEL LID

NORMALLY USED AS A PAIR.

LIGHTWEIGHT - ROBUST - USER FRIENDLY - COST EFFICIENT

5 ribs designed for maximum strength.

Lid can be produced **in recycled material.**

Can be personalised with a custom name plate.

> Equipped to accept an automatic lock.

3 hinge lugs for optimal strength.

Prop sockets are located at the rear of the lid. This is where the lid should be propped open.

> Nestable design for cost-effective freight.

> > 333

Moulded-in handle facilitates opening and closing

To fit 1 to 1.5 m³ containers.

AVAILABLE ACCESSORIES

> hinge bar and automatic lock.


MATERIAL

> Rotationally moulded from UV - stabilized LMDPE; double-walled; oil, chemical and frost resistant; 100% recyclable.

COLOURS


> Available in **black** and a wide variety of colours.



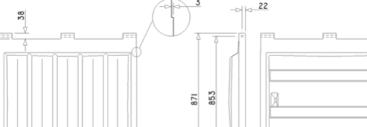

TECHNICAL DIMENSIONS

916 II6 OVERALL HEIGHT FROM CONTAINER HINGE HOLE 22 BANDING HEIGHT



4

ØI4MM I/D STEEL TUBE TO SUIT ØI2 HINGE ROD.

eng@duraflexlids.co.uk — 0044 1246 853696



ISO 9001 : 2015 ISO 14001 : 2015

www.duraflexlids.co.uk